


PHS Argo Plus (Multi-Tape)

PHS Argo Plus (Multi-Tape) is a premium adhesive tape for universal applications.

PHS Argo Plus (Multi-Tape) is used for airtight bonding and sealing of penetrations and overlaps of vapour barriers in accordance with DIN 4108-7. It is also suitable for bonding roofing underlays and facade membranes installed under an external weatherproof sheath. **PHS Argo Plus (Multi Tape)** is an adhesive tape in accordance with DIN 4108-11.

The multi-tape is characterised by a very pliable polyethylene film, layered with a reinforcement mesh, an extremely adherent and moisture resistant polyacrylate adhesive; this offers ease of application and outstanding ageing resistance.

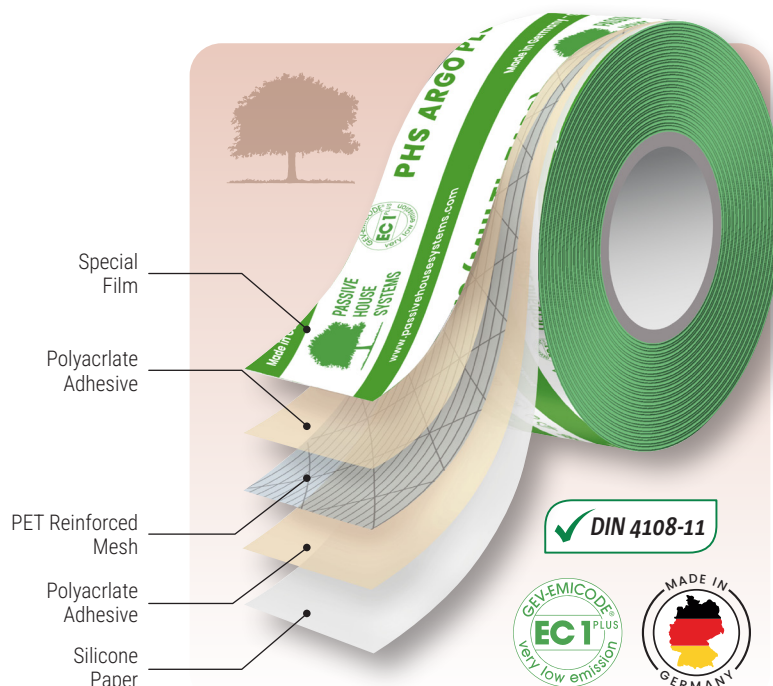

Product Description

Carrier

- Special film; thickness 0.09mm.
- UV-stabilized.
- PET reinforced mesh.

Adhesive

- Polyacrylate adhesive.
- Very high tack.
- Medium shear strength.
- Ideal for internal and external applications.

Special Features

- Very pliable.
- Long moisture-resistant.
- Outstanding ageing resistance.
- Universal use indoors and outdoors.

Applications

- Airtight bonding and sealing of penetrations and overlaps of internal wind and vapor barriers in accordance with DIN 4108-7.
- Bonding and sealing of overlaps, joints, and penetrations of permeable and non-permeable roofing underlayments on steep roofs as well as facade membranes sealed behind external sheathing.

Technical Data

| | |
|----------------------------------------------|------------------|
| Total thickness (DIN EN 1942)*: | 0.35 mm |
| Tensile strength (DIN EN ISO 29864)*: | ≥ 50 N/25 mm |
| Elongation (DIN EN ISO 29864)*: | 20 % |
| Adhesion (DIN EN ISO 29862)*: | ≥ 30 N/25 mm |
| Temperature range: | -40 °C to +80 °C |
| Core diameter: | 76.5 mm |

* according to the respective DIN.

Packaging Unit:

| | | | | |
|-------------------------|------|------|-----|-------|
| Roll Length | 25 m | | | |
| Roll Width mm | 50mm | 60mm | 75m | 100mm |
| Rolls Per Carton | 12 | 10 | 8 | 6 |

Application Notes

- Apply at temperatures from +5 °C to +40 °C.
- Surfaces for bonding must be stable, free of grease and dust.
- For bonding MDF boards we recommend preconditioning the surfaces with PHS Primer.
- Store in dry rooms from +5 °C to +25 °C, protected from UV-radiation.

Ireland: Passive House Systems
P31 W950, Ballincollig, Cork, Ireland
Tel. (+353) 021487 2664
www.passivehousesystems.ie

UK: Passive House Systems
CM16 6th, Epping, Essex, UK
Tel. (+44) 0333 880 2347
www.passivehousesystems.co.uk

Passive House Systems products are used by a very diverse customer base for a wide range of technical and industrial applications. The demands made on our products vary considerably from application to application. We strongly advise users to test the products suitability for their own particular requirement. All data and recommendations contained in this Technical Datasheet are based on our own test results and practical experience and are aimed at helping customers select the appropriate product. This information is provided without liability. We reserve the right to change the technical specification without prior notice. Samples are available free of charge. our sales team are available to help support all technical specifications for our products.